



ThermalRite
 15600 37th Ave N Suite 100
 Plymouth, MN 55446
 USA
 800-328-3968
 www.thermalrite.com

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: GPZ225A Desmon Series



Front locking casters, to keep unit in place.

GPZ225A

Pizza Prep Table Specifications

Create your pizzas on this professionally designed prep table featuring a granite top that includes a back splash and rails. In addition, it includes under-the-counter refrigerated storage space, above-the-counter refrigerated glass case display unit, and lockable casters.

CAPACITY

Under-the-counter Door Section – 21.9 cubic feet

Condiment Rail Pan Capacity – 10 ea, 1/3 pans

DIMENSIONS

88-3/8" x 31-1/2" x 58-1/8"

| ELECTRICAL SUPPLY | Cabinet | Rail |
|-----------------------------|----------------|-------------|
| HP | 1/4 | 1/12 |
| FLA/Circuit Ampacity | 15.9/20 | 1.8/15 |
| WATTS | 690 | 140 |
| SHELF GUIDES | 12 | N/A |

Desmon Pizza Prep Tables, designed and manufactured in Italy, are an outstanding value. Three-door refrigerated base provides space to keep your ingredients at the right temperatures. Ergonomic features increase user productivity. The refrigeration system is energy-efficient, oversized, and balanced to deliver quick recovery and maintain high quality. Focusing on the latest technology and high quality materials and components, this unit offers reliable product temperatures, lower utility costs, and the ability to adhere to food safety standards.

Standard Features

- Refrigerated cold wall condiment rail
- Easy-to-use electronic control digital panel
- Granite top, backsplash and side rails
- Slide-out refrigeration system simplifies maintenance
- Automatic defrost – Cabinet unit
- Automatic evaporation
- Gas R404A refrigerant
- CFC/HCFC-free cyclopentane foam insulation is 2-3/8" thick
- AISI 304 Grade Stainless Steel interior and exterior (except galvanized steel exterior bottom)
- Interior rounded corners for easy cleaning
- Casters – front locking
- Self-closing doors
- Push-fit magnetic door seal
- Ventilated front breathing
- Includes 3 wire shelves (17" x 25") for use in under-the-counter compartments
- Meets the demands of HACCP

Warranty

- 2-year Parts and Labor Warranty
- Additional Warranty for Years 3–5 on Compressor (part only)

Environment

- Manufactured with the environment in mind
- Ecological, R404A refrigerant
- CFC/HCFC-free, cyclopentane foaming extends effectiveness of insulation
- Lower energy consumption and fewer CO₂ emissions
- Made of nearly 99% recyclable materials
- ISO 14001 Certified

| | |
|-----------------|-------------|
| | |
| Approval: _____ | Date: _____ |




ThermalRite
15600 37th Ave N Suite 100
Plymouth, MN 55446
USA
800-328-3968
www.thermalrite.com

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: GPZ225A Desmon Series

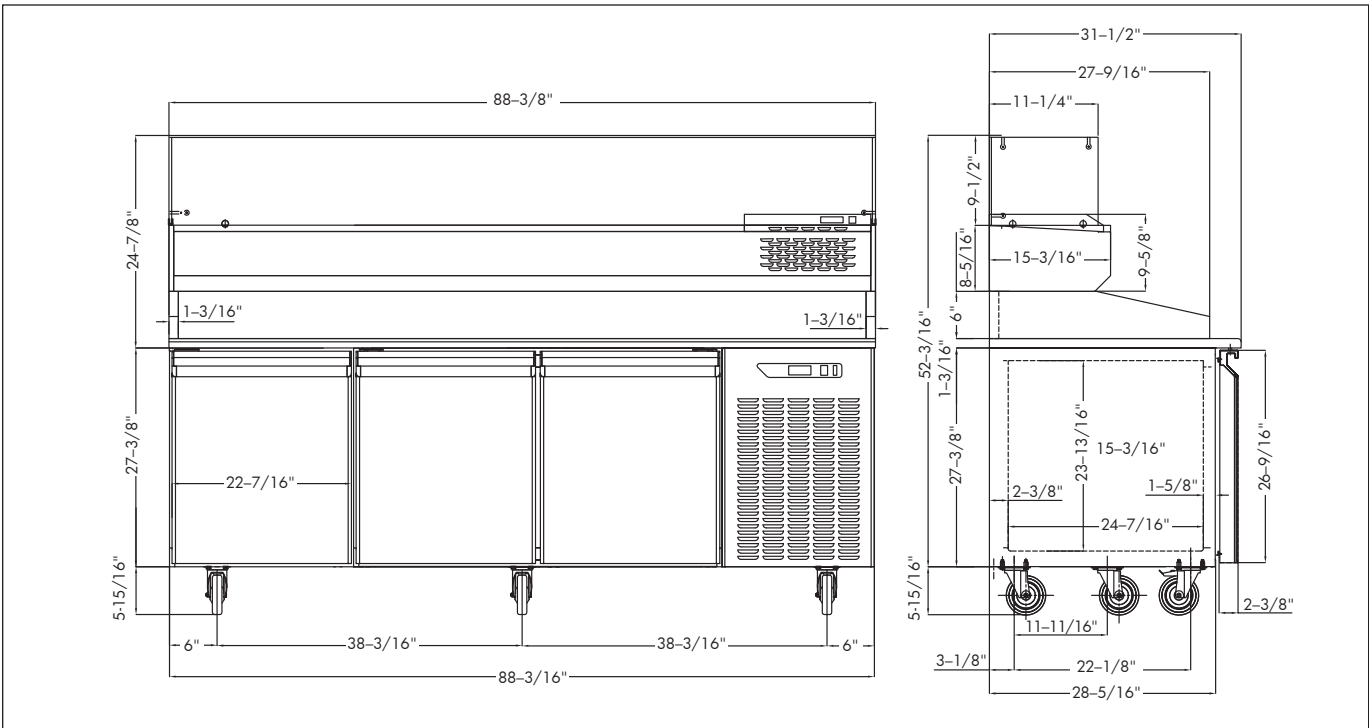

Standard Features

Cabinet Construction

Sturdy, stainless steel construction for durability and to resist scratches and dents. Many manufacturers offer stainless steel only on doors and front, but Desmon Pizza Prep Tables feature the finest stainless steel available on all sides and surfaces except the external bottom which is galvanized steel.

- Insulation with CFC-free, environmentally friendly, cyclopentane foaming keeps insulating properties effective longer than other foams.
- Panel thickness of 2-3/8" is thicker than panels of most competitors
- Interior rounded corners for easy cleaning

Cabinet Refrigeration System

- Factory engineered, self-contained, capillary tube system using environmentally friendly, CFC-free R404A refrigerant.
- Evaporator coil and condenser are balanced for low power consumption and to hold the widest temperature range in its class. Temperatures adjust from 28°F to 46°F.

- Hot gas evaporation – no drainline required.
- Sealed, cast iron, self-lubricating evaporator fan motors and larger fan blades feature a more efficient, low velocity, high volume air flow. These features are important for faster temperature recovery and shorter run times in busy foodservice facilities.
- Glass display refrigerated condiment rail – Cold wall technology that allows for equal distribution of cold to all pans – Manual defrost.

Doors

- Stainless steel exterior and interior. Door extends full width of cabinet shell.
- Positive sealing, self-closing door.
- Guaranteed door hinges and torsion type closure system.
- Magnetic door gasket features one-piece construction – removable without tools for ease of cleaning and replacement.

Shelving

- Adjustable, heavy duty PVC coated wire shelves
- Two (2) guides included per shelf

Model Features

- Exterior temperature digital display is adjustable with alarm and HACCP advanced control unit
- Evaporator is epoxy coated to eliminate the possibility of corrosion
- Rounded interior corners for easy cleaning

Electrical

- Unit completely pre-wired at factory and ready for final connection to a dedicated outlet
- Cord and plug included
- 115V/60Hz/1 phase – 15/20 amp

Warranty

- 2-year Warranty on parts and labor
- Additional Warranty for Years 3–5 on Compressor (part only)

| MODEL | DIMENSIONS | | | TOTAL WIRE SHELVES* | | AMBIENT TEMP | SHIPPING | |
|-------------|------------|---------|---------|---------------------|--------|--------------|-----------------------------|--------|
| | WIDTH | DEPTH | HEIGHT | DIMENSIONS | NUMBER | | DIMENSIONS | WEIGHT |
| GPZ225A | 88-3/8" | 31-1/2" | 58-1/8" | 17" x 25" | 12 | 109 °F | 93-3/8" x 35-3/4" x 59-7/8" | 992 |
| INCH | 88-3/8" | 31-1/2" | 58-1/8" | 17" x 25" | 12 | 109 °F | 93-3/8" x 35-3/4" x 59-7/8" | 992 |
| METRIC [MM] | 1660 | 800 | 1475 | 430 x 630 | 12 | +43 °C | 2250 x 800 x 1325 | 450 |

| | ELECTRICAL DATA | | | | | | | | COMPRESSOR |
|---------|-----------------|----|----|------|----------|------|-------------|------|------------|
| | Volts | HZ | PH | AMPS | AMP FUSE | NEMA | CORD LENGTH | WATT | HP |
| CABINET | 115 | 60 | 1 | 7 | 20 | 5-15 | 10' | 690 | 1/4 |
| RAIL | 115 | 60 | 1 | 1.6 | 15 | 5-15 | 8' | 140 | 1/12 |

Specifications subject to change without notice.

*Three wire shelves are included. Please order any additional shelves separately.



Cold Storage Solutions

GPZ225A0114